

DUCHESNE COUNTY MONUMENT SURVEY RECORD



T4S R9W

1/4


SEC 2 + SEC 1

U.S.B.&M.

X-21



SCALE: 1"=30'

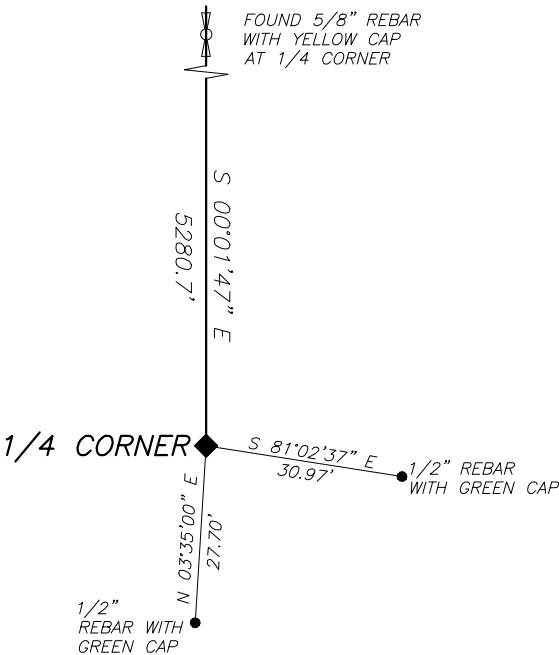

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT LOCATED AT LAT. 40°11'44.89846"N AND LONG. 110°49'41.53893"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND AND ACCEPTED IRON ROD BY T POST AT POSITION OF 1/4 CORNER



PHOTO OF MARKINGS ON MONUMENT

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET 5/8" X 24" REBAR WITH A DUCHESNE COUNTY 2 1/2" DIA. ALUMINUM CAP AT THE CORNER ALONG WITH TWO 1/2" REBAR WITH GREEN CAPS MARKED "REFERENCE MARKER"

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7228271.279
E: 1819644.882
NAVD88 EL: 7786.44'

LATITUDE: 40°09'42.16516" N
LONGITUDE: 110°51'31.30669" W
ELLIPSOID HEIGHT: 7731.39'
(GEOID 03 CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300040S0090W0_600640



PHOTO OF MONUMENT FACING NORTH

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 20 MAY '19

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

